


Centalic Series-BIP16/170/39

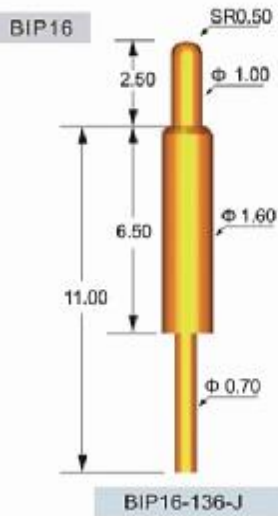


Technical Specifications

Recommended	
Minimum Center	2.54mm(100mil)
Current Rating	3amps, continuous
Contact Resistance	40milliohms(Maximum)
Full Stroke	2.50mm
Rated Stroke	1.80mm
Spring Force	95gf(3.4 oz)

Materials

Contact Barrel	Brass, Gold Plated
Spring	Music Wire, Gold Plated
Plunger	BeCu, Gold Plated

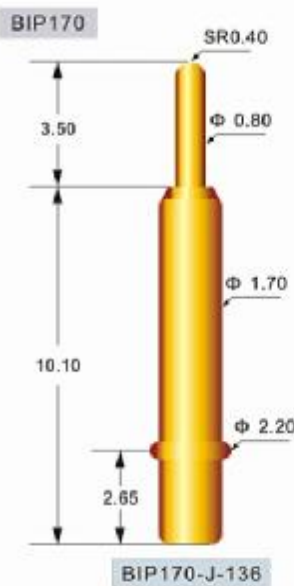


Technical Specifications

Recommended	
Current Rating	3amps, continuous
Contact Resistance	50milliohms(Maximum)
Full Stroke	3.50mm
Rated Stroke	2.00mm
Spring Force	230gf(8.0 oz)

Materials

Contact Barrel	Bronze, Gold Plated
Spring	Music Wire, Gold Plated
Plunger	BeCu, Gold Plated

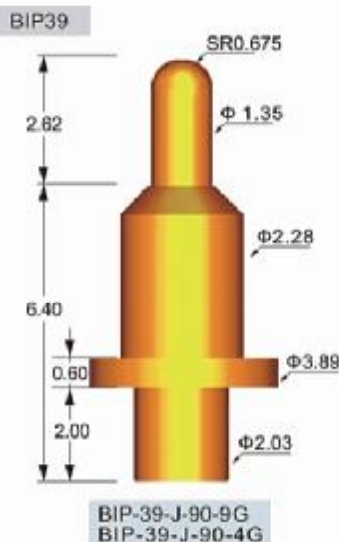

Technical Specifications

Recommended	
Minimum Center	5.084mm(200mil)
Current Rating	3amps, continuous
Contact Resistance	40milliohms(Maximum)
Full Stroke	2.60mm
Rated Stroke	1.70mm
Spring Force	113/255gf(4.0/9.0 oz)

Materials

Contact Barrel	Brass, Gold Plated
Spring	Music Wire, Gold Plated
Plunger	Brass, Gold Plated