


SWP298-F-7G(B)

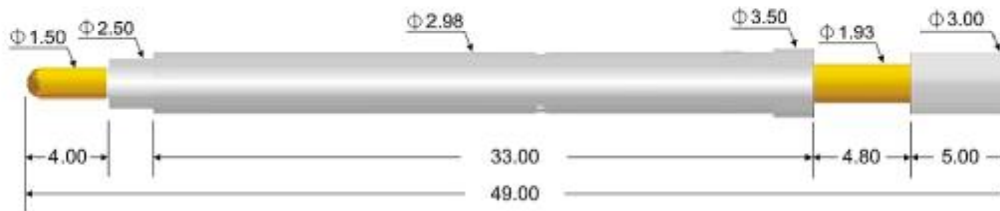

Technical Specifications

Recommended	
Current Rating	3 amps
Contact Resistance	50milliohms
Full Stroke	4.67mm
Rated Stroke	2.50mm
Spring Force	200gf@load 2.50mm
Normality Condition	Disconnecting Betwven Plunger1 And Plunger2
Press Down 2.0mm	Continuity Betwven Plunger1 And Plunger2

Materials(plated)

Contact Barrel	Brass, Au on Ni Plated
Spring	SUS
Plunger(1)	BeCu, Au on Ni Plated
Plunger(2)	Brass, Ni Plated
Insulating Sleeve	POM