


# Centalic Series-PE75(PO)

## Probe

PE75 (PO)

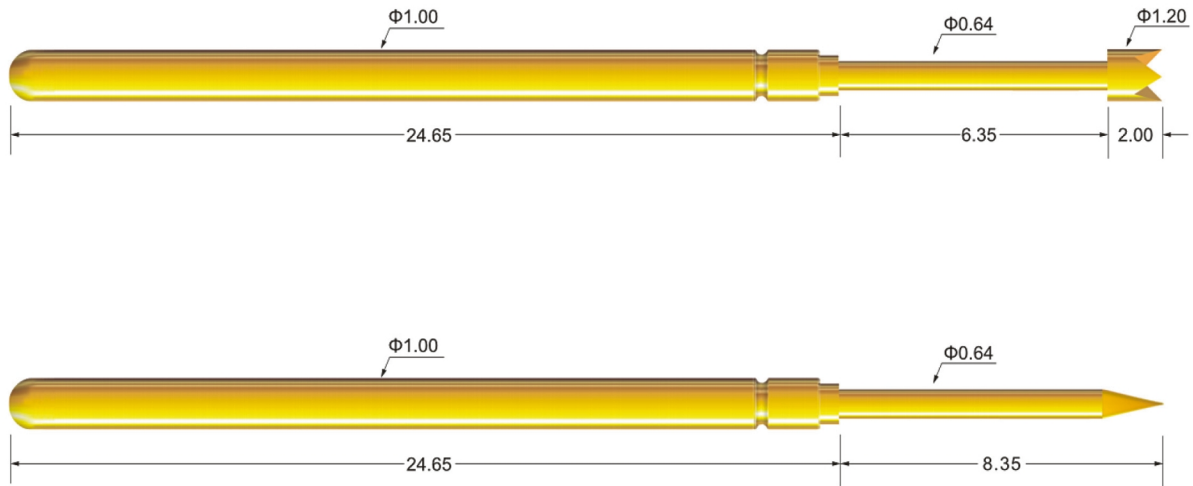

### Technical Specifications

Recommended	
Minimum Center	1.91mm(75mil)
Current Rating	3amps, continuous
Contact Resistance	40milliohms
Full Stroke	6.35mm
Rated Stroke	4.30mm
Spring Force	155gf ( 5.5 oz )/203gf ( 7.2 oz ) / 227gf(8 oz)/300gf(10 oz)

### Materials

Contact Barrel	Brass, Gold Plated
Spring	Music Wire, Gold Plated
Plunger	BeCu, Nickel Plated or Gold Plated